

FROG Pool Tender® Instruction Manual

Mineral Pool-Care Cyclor for Pools up to 25,000 Gallons



Cleaner

because it kills bacteria two ways

Clearer


because it helps keep pH in range

Softer

because it reduces chlorine use up to 50%*

Easier

with prefilled pacs for no mess,
no guess and no stress



FROG Pool Tender Cyclor comes with the FROG Pool Tender Mineral Chamber®

Patented Mineral Disinfectant

Customer Service 800-222-0169

frogproducts.com



WARNING

To minimize the risk of serious injury, death or damage, before installing or first using this equipment, read Instruction Manual and all safety labels and follow all safety instructions and precautions. Save manual for future reference.

Ver la versión en español de este manual en frogproducts.com/product/frogpooltender

TABLE OF CONTENTS

FROG Pool Tender Introduction	3
Notes and Safety Information	4
Safety Labels on Cyclor	5
Installation Tips to Ensure Proper Performance	6
Sand Filter Installation with Nipple Kit and Flex Hose	7
Sand Filter Installation with Flex Hose Only	8
DE and Cartridge Filter Installation	9
Hard-Plumbed Installation	10
Step 1: Preparing the Pool	11
Step 2: Putting the System to Work	12
Step 3: Setting the Control Dial	13
Step 4: Routine Pool Care	14
Replacing FROG Pool Tender Mineral Chamber	15
Using FROG Pool Tender Algaecide	16
Using FROG Pool Tender Chlorine Chamber®	17
Winterizing	18
Troubleshooting	19
Parts List	20
Maintenance - Replacing Control Dial O-Rings	21
Maintenance - Replacing Cap O-Rings and Knobs	22

For information on King Technology's entire product line, visit our website at frogproducts.com

Welcome to easier pool care courtesy of FROG®. With FROG Pool Tender, your pool water will look and feel better without a lot of work or a lot of chlorine. This system[†] controls bacteria using a combination of minerals and reduced chlorine levels—up to 50%* less.

There are 4 parts to the FROG Pool Tender System:

1. FROG Pool Tender Cyclor
2. FROG Pool Tender Mineral Chamber
3. FROG Pool Tender Algaecide
4. FROG Pool Tender Chlorine Chamber

Part 1

FROG Pool Tender Cyclor

The water treatment center that controls the flow of water to each part of the FROG Pool Tender System.



For Pools up to
25,000 gallons.
Part No. 01-02-4180

Part 2

FROG Pool Tender Mineral Chamber

Holds the minerals and fits inside the FROG Pool Tender Cyclor.
Part No. 01-13-4412



Part 3

FROG Pool Tender Algaecide

Use with the FROG Pool Tender Cyclor for a 90-Day Algae-Protection Guarantee. One bottle is good for 15,000 gallons.
Part No. 01-11-4060



Part 4

FROG Pool Tender Chlorine Chamber

Prefilled with chlorine tablets and fits inside the FROG Pool Tender Mineral Chamber.
Part No. 01-04-4440



**FROG Pool Tender Mineral Chamber comes inside FROG Pool Tender Cyclor and is also sold separately.
FROG Pool Tender Chlorine Chamber and FROG Pool Tender Algaecide also sold separately.**

[†]FROG Pool Tender Mineral System consists of the FROG minerals silver chloride and carbonate used in conjunction with 0.5 ppm chlorine. The FROG Pool Tender Mineral Chamber must be used in conjunction with the FROG Pool Tender Chlorine Chamber, an EPA registered chlorine pool product or a chlorine delivery device.

*Compared to the minimum EPA recommended chlorine level of 1.0 ppm for a stabilized swimming pool.

∞ For pools and hot tubs.

Notes and Safety Information

General Notes

These instructions contain information for the safe and proper operation of this Cyclor. Observe the following principles:

- Ensure that everyone using this Cyclor follows the instructions and safety precautions.
- Keep the instructions nearby and available for reference throughout the service life of this Cyclor.

These instructions do not provide for every possible contingency that might be encountered in connection with installation, operation or maintenance of this equipment. Should further information be desired or should particular issues arise which are not covered sufficiently in this manual, contact King Technology at 800-222-0169.





Explanation of the signal words

Signal words, which depict the probability and severity of harm, are used in these instructions. They are defined as follows:

Signal Word	Meaning
DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death, serious injury or major property damage.
WARNING	Indicates a hazardous situation which, if not avoided, could result in serious injury, death, or major property damage.
NOTICE	Indicates special instructions that are important but not related to physical injury hazards.


Explanation of the safety pictographs

The following pictographs illustrate the type of hazard.

Pictograph	Type of Danger
	Safety Alert/General Hazard
	Explosion Risk
	Hazardous Pressure
	Flammable Fire Hazard

Identification of warnings

Warnings are intended to help you recognize risks and avoid death, injury or property damage. This is how warnings are identified:

 Signal Word
Pictographs
Description of danger. Consequences if ignored. ⇒ The arrow signals a safety precaution to be taken to eliminate or reduce the risk.

Safety Label on Cyclor

Review this label before installing or operating this Cyclor. Contact King Technology at 800-222-0169 if this label is missing from your FROG Pool Tender Cyclor.



Fire, explosion and high pressure hazards

To minimize the risk of serious injury, death or property damage while using the FROG Pool Tender Cyclor:

- ⇒ Read, understand and follow all instructions and safety precautions in the manual, and on this Cyclor and on any label for chemicals used with this Cyclor including FROG Pool Tender Chlorine Chambers, FROG Pool Tender Mineral Chamber and FROG Pool Tender Algaecide.



DANGER

- ⇒ Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.
- ⇒ Never mix Trichlor chlorine tablets with Calcium Hypochlorite, or with any other form of concentrated chlorine or other chemicals.
- ⇒ Never add any other types of chlorine or shock treatments through the skimmer. These products should be added directly into the pool if required.
- ⇒ Do not contaminate the FROG Pool Tender Cyclor, FROG Pool Tender Mineral Chamber, FROG Pool Tender Chlorine Chamber or FROG Pool Tender Algaecide with dirt, organic matter, pool chemicals (such as calcium hypochlorite or pool shocks), fertilizers or other household chemicals. Contact between any of these substances and the FROG Pool Tender Cyclor, FROG Pool Tender Mineral Chamber, FROG Pool Tender Chlorine Chamber or FROG Pool Tender Algaecide, will result in a chemical reaction with the generation of heat, liberation of hazardous gasses and fire or explosion.



WARNING

- ⇒ Use only FROG Pool Tender Chlorine Chambers, FROG Pool Tender Mineral Chamber, and FROG Pool Tender Algaecide in the FROG Pool Tender Cyclor. Never use bulk chemicals.
- ⇒ To prevent the build up of gas pressure in the FROG Pool Tender Cyclor, be sure the pool return line valves are open – except when opening or servicing the unit.
- ⇒ Do not inhale fumes from the FROG Pool Tender Cyclor or FROG Pool Tender Chlorine Chamber.
- ⇒ Avoid sparks, smoking, or any open flame near FROG Pool Tender Cyclor or chemicals.
- ⇒ Do not exceed maximum operating pressure of 50 psi or maximum temperature of 104° F.
- ⇒ Do not remove the cap while under pressure. Always turn off pump and bleed off pressure before opening FROG Pool Tender Cyclor.
- ⇒ Do not install automatic or fast shut off valves downstream of Cyclor.
- ⇒ Always install the FROG Pool Tender Cyclor AFTER a heater (if applicable) on the return line.
- ⇒ Always install any additional sanitizing equipment AFTER and NEVER BEFORE the FROG Pool Tender Cyclor is installed on the return line.
- ⇒ Do not permit children to use or climb on this product. This product must be positioned to prevent children from using it as a means of access to the pool.
- ⇒ Always stand clear of the FROG Pool Tender Cyclor during pump start-up.
- ⇒ Replace FROG Pool Tender Cyclor if you see signs of cracks, damage or degradation to the Cyclor body or cap.

NOTICE

- ⇒ Prior to pressurizing, check with your dealer to ensure your plumbing connections meet building codes.
- ⇒ Failure to properly winterize your FROG Pool Tender Cyclor could result in freeze damage. (See page 18 for winterizing details.)

Installation Tips to Ensure Proper Performance

Before installing, read all directions carefully and contact your dealer for installation support.



WARNING

- Do not exceed maximum operating pressure of 50 psi.
- Do not install automatic or fast shut off valves downstream of FROG Pool Tender Cyclers.
- Always install the FROG Pool Tender Cycler AFTER the heater (if applicable) on the return line.
- Always install any additional sanitizing equipment AFTER and NEVER BEFORE the FROG Pool Tender Cycler is installed on the return line.

1) If using a multi-speed pump, run pump for at least 6 hours per day at high speed (at least 40 gpm).

If the pump will run on low speed 24 hours per day or less than 6 hours per day on high speed, you must bleed the air while the pump is on by unscrewing the back knob until water appears. Then screw the knob back in. Repeat this process each time the cap is removed for any reason.



2) Install Cycler with 4-8 psi back pressure.

Lower back pressures could result in under chlorination. Change the eyeball fittings in the return jets to a smaller size to increase back pressure. Contact King Technology at 800-222-0169 for a specially designed Cycler pressure gauge to determine back pressure at pool start-up.



Part No. 01-22-4000

3) Special installation Requirements:


IMPORTANT: Over chlorination or damage to the FROG Pool Tender Cycler or other equipment could result if special installations A, B or C are not used in these situations.

- If water flow is higher than 80 gallons per minute (gpm), see diagram A.
- If an in-floor cleaner is included with pool, see diagram B, with two options. Preferred installation is Option 1 with two separate lines.
- If set-up is a pool and spa combination with common equipment, see diagram C.

Questions? Call Customer Service at 800-222-0169 Monday thru Friday, 8 am to 5 pm central time.

A. With High Flow Rate (greater than 80 gpm)


Install T-fittings exactly as shown.

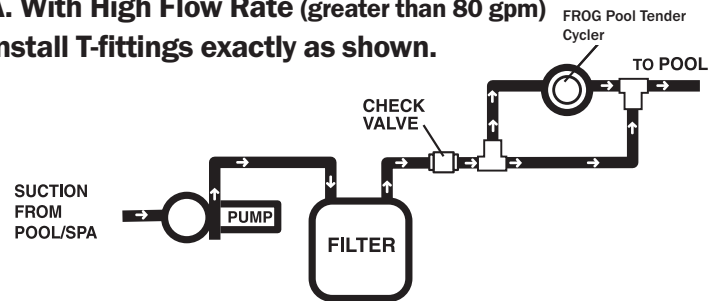


B. With In-Floor Cleaner - TWO OPTIONS

OPTION 1- A Two-Line Installation


The best option is to have two lines. One line with pump, filter, heater and FROG Pool Tender Cycler and a second line with a separate pump for the in-floor cleaning system (filter optional).

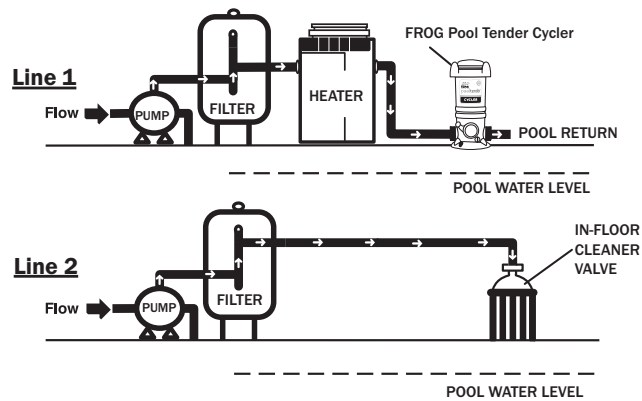

OPTION 2 - A 3-Way Valve Installation

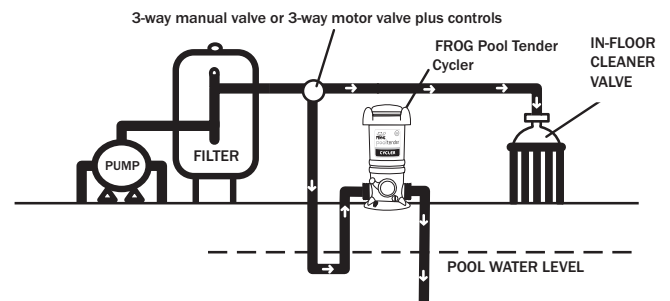

C. Pool and Spillover Spa Combination

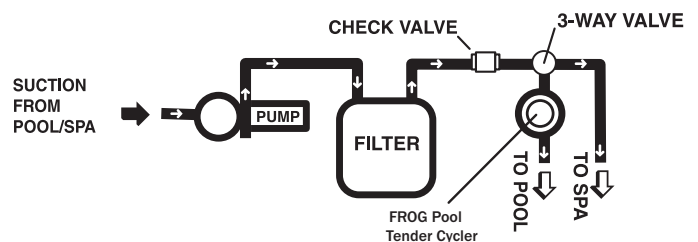


TOOLS NEEDED

Screwdriver




Pipe Wrench




INCLUDED WITH FROG Pool Tender Cyclor

Pipe Thread Tape or Sealant




One 6" X 1½" TBE PVC Nipple




MATERIALS NEEDED

One Hose Adapter
1½" X 1½" X 1¼"



One Section of
1½" or 1¼" Flex Hose



One
Hose Clamp



RECOMMENDED


4-8 psi Back Pressure

To avoid over or under chlorination, replace eyeball fittings in the return jets to a smaller or larger size to adjust back pressure. For best results use King Technology's pressure gauge, order Part No. 01-22-4000.




Sand Filter Installation with Nipple Kit and Flex Hose


1. Apply pipe thread tape or sealant to each threaded end of nipple.




2. Screw one end of nipple into the filter return. Hand tighten. Finish tightening by turning 1 to 2 revolutions with a pipe wrench. **DO NOT OVER TIGHTEN.**




3. Screw either side of FROG Pool Tender Cyclor on to open nipple end until upright and secure.

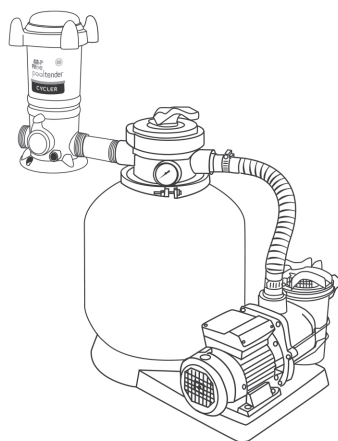


4. Apply pipe thread tape or sealant to threaded end of hose adapter.




5. Screw adapter into the other side of FROG Pool Tender Cyclor. Hand tighten. Finish tightening by turning 1 to 2 revolutions with a pipe wrench. **DO NOT OVER TIGHTEN.**

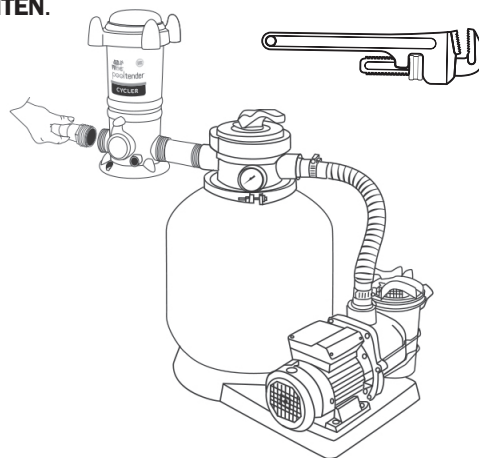

6. Attach return section of hose to the adapter with clamp. Tighten clamp with screwdriver.

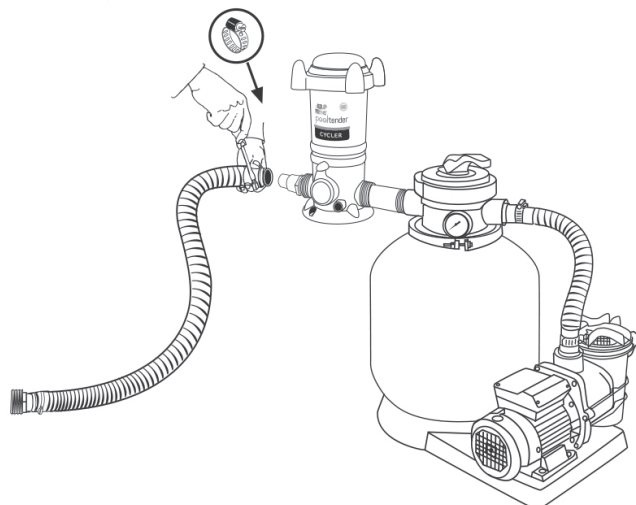


7. To prevent damage to heaters or filters, see your dealer about installing a **corrosion resistant check valve** which will reduce the back flow of chlorine gas when the FROG Pool Tender Cyclor is turned off.

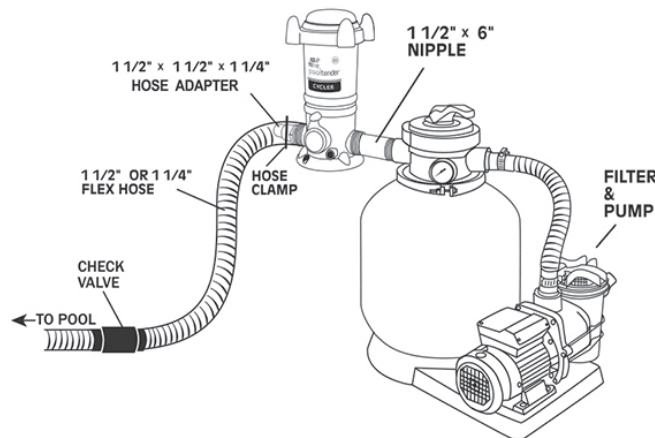


TOOLS NEEDED

Screwdriver




Pipe Wrench



MATERIALS NEEDED


Pipe Thread Tape
or Sealant



Two hose adapters
1½" X 1½" X 1¼"



Two Sections of 1½"
or 1¼" Flex Hose (one
provided with filter)



Two
Hose
Clamps




RECOMMENDED

4-8 psi Back Pressure


To avoid over or under chlorination, replace eyeball fittings in the return jets to a smaller or larger size to adjust back pressure. For best results use King Technology's pressure gauge, order Part No. 01-22-4000.




Sand Filter Installation with Flex Hose Only

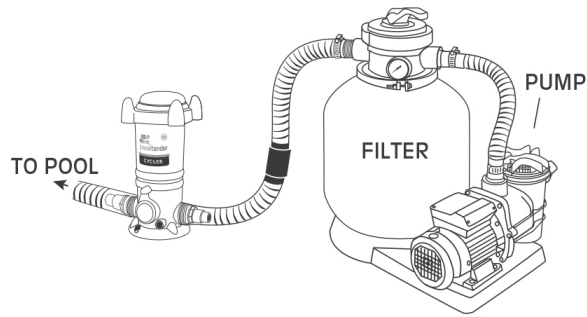

The FROG Pool Tender Cycler should always be installed between the filter and pool (or between heater and pool if applicable). Never install FROG Pool Tender Cycler before the heater or damage to the heater could occur.




1. Apply pipe thread tape or sealant to the threaded end of both hose adapters.

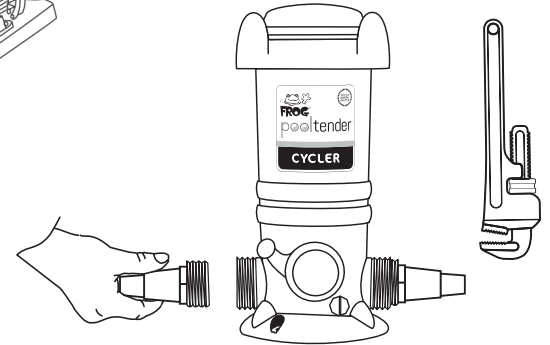


2. Screw adapters into each end of FROG Pool Tender Cycler. Hand tighten. Finish tightening by turning 1 to 2 revolutions with pipe wrench. **DO NOT OVER TIGHTEN.**


3. Attach the filter section of flex hose to one hose adapter and the return section of flex hose to the other hose adapter with clamps and tighten with screwdriver. Bi-flow valve design allows water flow installation in either direction.

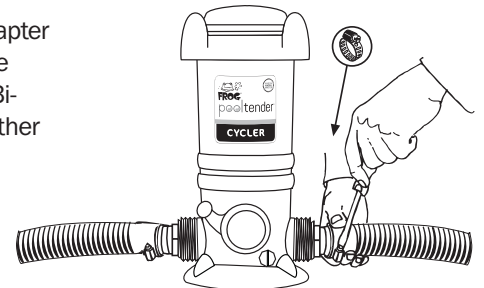

4. To prevent damage to heaters or filters, install a **corrosion resistant check valve** which will reduce the back flow of chlorine gas when the system is turned off.

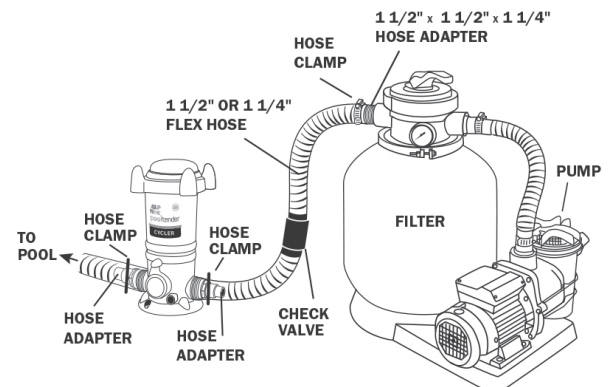


5. For better stability, FROG Pool Tender Cycler may be mounted on a treated wood base using **Phillips pan head screws**, one in front and two in back. If you have questions about stability, please contact your dealer or King Technology.




TOOLS NEEDED


Screwdriver





Pipe Wrench

**INCLUDED WITH FROG Pool Tender Cyclor**

Pipe Thread Tape or Sealant




One 6" X 1½" TBE PVC Nipple


**MATERIALS NEEDED**One Hose Adapter
1½" X 1½" X 1¼"One Section of
1½" or 1¼" Flex HoseOne
Hose Clamp**RECOMMENDED**


4-8 psi Back Pressure

To avoid over or under chlorination, replace eyeball fittings in the return jets to a smaller or larger size to adjust back pressure. For best results use King Technology's pressure gauge, order Part No. 01-22-4000.


**DE and Cartridge Filter Installation**


1. Apply pipe thread tape or sealant to each threaded end of nipple. 


2. Screw one end of nipple into the filter return. Hand tighten. Finish tightening by turning 1 to 2 revolutions with a pipe wrench. **DO NOT OVER TIGHTEN.** 

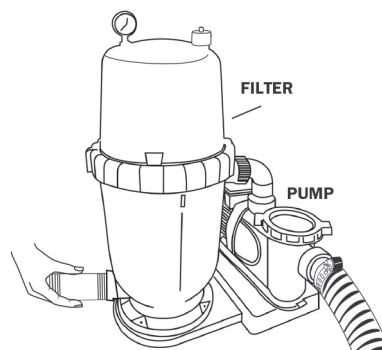


3. Screw either side of FROG Pool Tender Cyclor on to open nipple end until upright and secure.

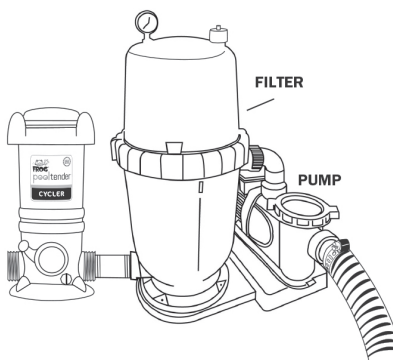


4. Apply pipe thread tape or sealant to threaded end of hose adapter. 



5. Screw adapter into the other side of FROG Pool Tender Cyclor. Hand tighten. Finish tightening by turning 1 to 2 revolutions with a pipe wrench. **DO NOT OVER TIGHTEN.** 

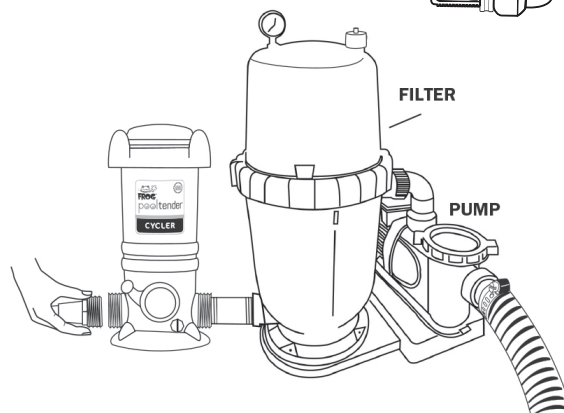

6. Attach return section of hose to the adapter with clamp. Tighten clamp with screwdriver.

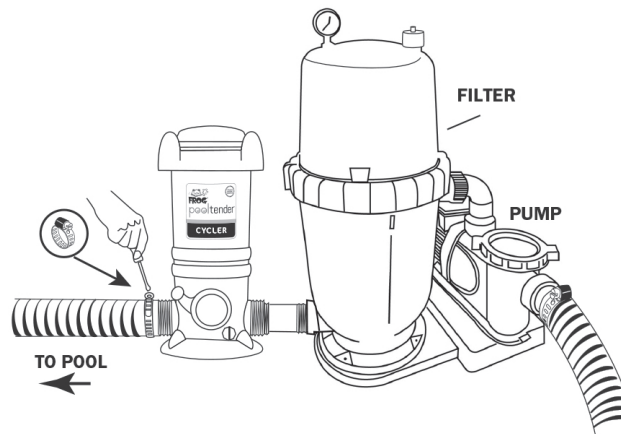


7. For better stability, FROG Pool Tender Cyclor may be mounted on a treated wood base using **Phillips pan head screws**, one in front and two in back. If you have questions about stability, please contact your dealer or King Technology.

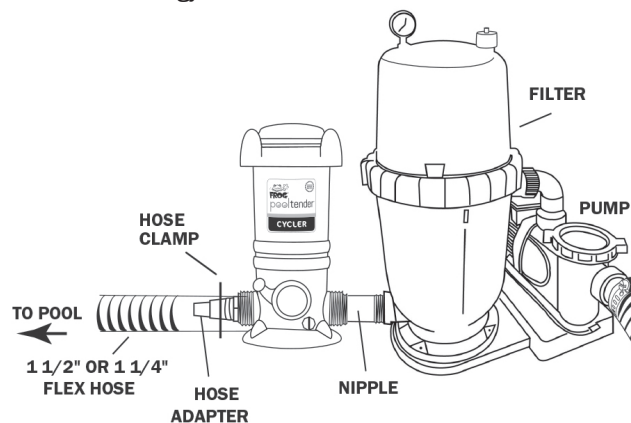


TOOLS NEEDED

Pipe Wrench



Hacksaw




Tape Measure



MATERIALS NEEDED

Pipe Thread Tape or Sealant, Primer and PVC Cement



1½" Male Adapter (slip x MPT)




or

2" Female Adapter (slip x FPT)




SECURE CYCLER



For better stability, FROG Pool Tender Cyclizer may be mounted on a treated wood base using **Phillips pan head screws**, one in front and two in back. If you have questions about stability, please contact your dealer or King Technology.

Hard-Plumbed Installation

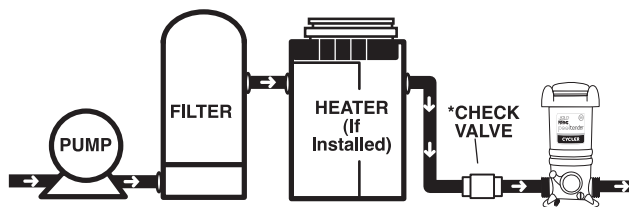


The FROG Pool Tender Cyclizer should always be installed between the filter and pool (or between heater and pool if applicable). Never install FROG Pool Tender Cyclizer before the heater or damage to the heater could occur.


Do NOT install in copper pipe if using FROG Pool Tender Chlorine Chamber as chemical corrosion may lead to pipe failure.



Do NOT install FROG Pool Tender Cyclizer off-line.

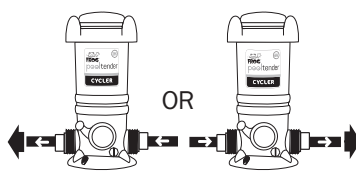

Bi-flow valve design allows installation in either flow direction.



Allow a minimum of 12" above and on each side of FROG Pool Tender Cyclizer to ensure room for easy replacement of FROG Pool Tender Mineral Chamber and FROG Pool Tender Chlorine Chamber.

1. Screw adapters into each end of FROG Pool Tender Cyclizer following directions for a male adapter or a female adapter. Hand tighten. Finish tightening by turning 1 to 2 revolutions with a pipe wrench. **DO NOT OVER TIGHTEN.**




1a.

If using **male adapters**, apply pipe thread tape or sealant to the threaded end of each adapter.

1b.

If using **female adapters**, apply pipe thread tape or sealant to the threaded end of each cyclizer port.

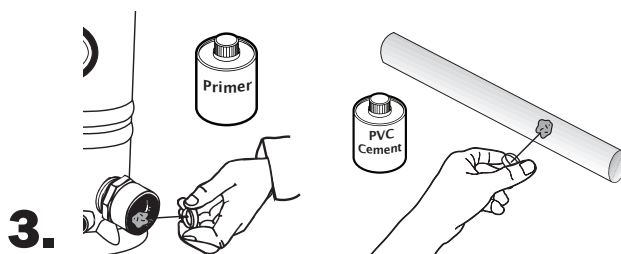


3.

Following Primer directions, brush Primer on the inside of the adapters and to ends of pipe. Repeat this process with PVC cement following manufacturer's directions on that product.

4.


Insert PVC pipe into adapters with a twisting action. Hold in place 5 to 10 seconds to bond.

5.

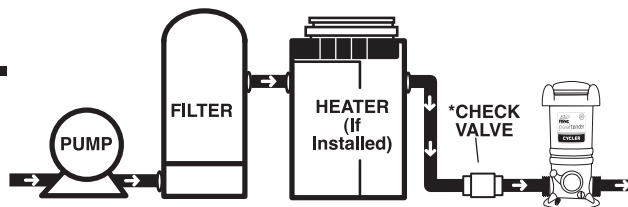


To prevent damage to heaters or filters, see your dealer about installing a **corrosion resistant check valve** which will reduce the back flow of chlorine gas when the Cyclizer is turned off.

Step 1: Preparing the Pool

- 

Make sure the pool has adequate circulation. The total volume of pool water must completely circulate through the pump and filter at least 1 to 2 times per day. This usually requires 8 to 12 hours of circulation. Check with your dealer for the proper circulation time for your pool.

- 


Check the pool's filter gauge often and periodically clean filter per the manufacturer's directions. A dirty filter will slow the flow of water which could hamper proper circulation.



WARNING

Do not exceed maximum operating pressure of 50 psi.

- Check the Water Hardness of your fill water before adding to the pool. If calcium content is higher than 400 ppm, find a soft water source to fill your pool instead; otherwise water balance will be very difficult.

- 

Check for metals in the pool such as iron or copper. Before attempting water balance, these should be removed. See your dealer for a metal out or sequesterant and follow the label directions carefully.

- Before beginning with any pool care program, you must first balance your pool water. Take a water sample to your local pool professional (or use a complete test kit) to test for the important Water Balance Guidelines.


IMPORTANT: Always follow printed instructions on the balancing chemical packages. Add balancing chemicals in small increments one at a time with circulation running. **For best results, wait 8-12 hours** before testing again and adding any additional balancing chemicals.

Water Balance Guidelines

pH:	7.2 – 7.8
Total Alkalinity:	80 – 120 ppm
Hardness:	200 – 400
Total Dissolved Solids:	<1500
Stabilizer:	20 – 80 ppm
Free Chlorine:	0.5 – 1.0 ppm

For best results in achieving water balance, follow steps **5a through 5e** in order.


- Take a water sample from the pool and dip a FROG Test Strip into it.



- Look at the **Total Alkalinity** reading first. Adjustments should be made to bring the Total Alkalinity in the range of **80 – 120 ppm** prior to making any adjustments to pH even if it throws pH off further.



- After Total Alkalinity is in range, test for **pH**. It should be between **7.2 and 7.8**. If higher or lower, add a pH adjuster.

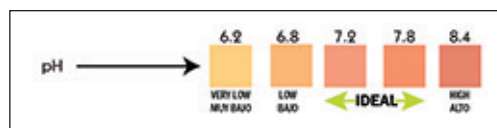

- Then test your Water Hardness again. If lower than 200 ppm, add Calcium Increaser. Always maintain 200-400 ppm.

- Lastly test for **stabilizer** or **conditioner levels**. Add conditioner if the level is below 20 ppm. This will prevent chlorine burn off. If stabilizer level is above 80 ppm, partially drain water and re-fill.

6.



Initially shock the pool with a **chlorine shock only** to rid the water of contaminants and establish a chlorine residual. Always follow the manufacturer's directions carefully. See the DANGER box below for important guidance on shocking.



DANGER

- Never add any other types of chlorine or shock treatments through the skimmer. These products should be added directly into the pool if required.
- Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.

Step 2: Putting the System to Work

1.



Install a FROG Pool Tender Mineral Chamber into the FROG Pool Tender Cyclor. (See page 15 for directions.)

IMPORTANT:

Replace the FROG Pool Tender Mineral Chamber every 6 months or after one pool season, whichever is shorter. After that time, you will hear the spent media inside, however it is no longer effective and must be replaced.

2.



Replace cap and run FROG Pool Tender Cyclor, with FROG Pool Tender Mineral Chamber inserted, for 10 minutes on Setting 10.

3.



Insert FROG Pool Tender Algaecide into the open center of the FROG Pool Tender Mineral Chamber in the FROG Pool Tender. (See page 16 for directions.)



4.



When chlorine reading is down to 1.0 ppm, which may take a few days, insert FROG Pool Tender Chlorine Chamber into the open center of the FROG Pool Tender Mineral Chamber. (See page 17 for directions.)

Step 3: Setting the Control Dial

1.

This Cycler is designed to work effectively with a variety of pool equipment as long as the following procedures are followed.

Set the control dial by matching up the parameters of your pool on the chart below. THIS IS A STARTING POINT ONLY and may need to be adjusted to fit your individual pool needs. See #2 below for adjusting directions. **IMPORTANT:** If using a multi-speed pump, pump-run times of at least 6 hours per day at high speed are recommended for proper performance.

If running the pump at low speed only or on high speed less than 6 hours per day, please follow the 24 hour low-speed directions below.

POOL SIZE Gallons Diameter		SINGLE SPEED PUMP OR HIGH SPEED PUMP RUN TIME											
		8 HOUR PUMP RUN TIME				12 HOUR PUMP RUN TIME				24 HOUR PUMP RUN TIME			
		PUMP SIZE				PUMP SIZE				PUMP SIZE			
		1/2 hp	3/4 hp	1 hp	1 ½ hp	1/2 hp	3/4 hp	1 hp	1 ½ hp	1/2 hp	3/4 hp	1 hp	1 ½ hp
7,000	(18')	5.0	4.5	4.0	3.5	4.5	4.0	3.0	5.0^	3.5	3.0	2.5	4.0^
9,000	(21')	5.5	5.0	4.5	4.0	5.0	4.5	4.0	5.5^	4.0	3.5	3.0	4.5^
12,000	(24')	6.0	5.5	5.0	4.5	5.5	5.0	4.5	4.0	4.5	4.0	3.5	5.0^
15,000		NR	6.0	5.5	5.0	6.0	5.5	5.0	4.5	5.0	4.5	4.0	3.5
20,000		NR	NR	6.0	5.5	NR	6.0	5.5	5.0	5.5	5.0	4.5	4.0
25,000		NR	NR	6.5	6.0	NR	6.5	6.0	5.5	6.0	5.5	5.0	4.5

^ - Bypass installation recommended. See "Installation Tips" on page 6. NR - This pump size is not recommended for this size pool. RECOMMENDED FLOW RATE: 20-60 gpm

24 HOUR, LOW-SPEED PUMP-RUN TIME

In order to ensure proper performance when running the pump on low speed for 24 hours per day or high speed less than 6 hours per day, bleed the air while the pump is on by unscrewing the knob on the back of the Cycler near the cap until water appears. Then screw the knob back on. Repeat this process each time the cap is removed for any reason. Set the control dial at #6 and follow the adjustment directions below to determine the correct setting for your pool.

EXAMPLE


POOL SIZE Gallons Diameter		12 HOUR PUMP RUN TIME			
		PUMP SIZE			
		1/2 hp	3/4 hp	1 hp	1 ½ hp
7,000	(18')	4.5	4.0	3.0	5.0^
9,000	(21')	5.0	4.5	4.0	5.5^
12,000	(24')	5.5	5.0	4.5	4.0
15,000		6.0	5.5	5.0	4.5
20,000		NR	6.0	5.5	5.0
25,000		NR	6.5	6.0	5.5

Find your starting dial setting by matching up the parameters of your pool on the above chart. An above ground pool with approximately 12,000 gallons, with a 1 horsepower pump running 12 hours a day, would require a starting setting of 4.5.

2.



For the first week, test the pool water daily for free chlorine with FROG Test Strips to ensure correct dial setting. Continue to test weekly throughout the season.



After each testing, adjust the dial up by 1/2 increment if the free chlorine reading has dropped below 0.5 ppm or adjust down by 1/2 increment if the reading has risen above 1.0 ppm. Continue this process each day until the free chlorine reading stabilizes to at least 0.5 ppm.

IMPORTANT: Control dial settings in excess of these recommendations could result in excess trichlor levels being discharged into the pool. This can result in bleaching or discoloration of areas around the pool inlet or, in some cases, bleaching or discoloration of the entire pool liner or paint. In addition, excess trichlor in the pool can create health hazards to bathers.

Remember to adjust dial by 1/2 increments only in order to prevent over chlorination which may bleach pool surfaces.

Step 4: Routine Pool Care

1.



Run filtration enough hours to circulate all water 1 to 2 times per day. More than that could result in over chlorination.



WARNING

To prevent the build up of gas pressure in the FROG Pool Tender Cyclor, be sure the pool return line valves are open –except when opening or servicing the unit.

2.



Regularly test water with FROG Test Strips to maintain pH and Total Alkalinity.

NOTE: Water balance is affected by bather load, chemical usage, evaporation and the makeup of source water, so maintaining water balance regularly is important.

3.



Maintain 0.5 to 1.0 ppm free chlorine level at all times.

Note: These lower chlorine levels are only acceptable when using FROG minerals.



DANGER

Do not contaminate the FROG Pool Tender Cyclor, FROG Pool Tender Mineral Chamber, FROG Pool Tender Chlorine Chamber or FROG Pool Tender Algaecide with dirt, organic matter, pool chemicals (such as calcium hypochlorite or pool shocks), fertilizers or other household chemicals. Contact between any of these substances and the FROG Pool Tender Cyclor, FROG Pool Tender Mineral Chamber, FROG Pool Tender Chlorine Chamber or FROG Pool Tender Algaecide, will result in a chemical reaction with the generation of heat, liberation of hazardous gasses and fire or explosion.

4.



Shock the pool every other week or as needed. We recommend a non-chlorine shock as reducing chlorine use is the goal of FROG products. However, using a chlorine shock is OK too.



DANGER

- Never add any other types of chlorine or shock treatments through the skimmer. These products should be added directly into the pool if required.
- Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.

5.



Before closing the pool for winter, use FROG Pool Tender Algaecide following the directions on page 16.

6.



Remember to replace FROG Pool Tender Mineral Chamber and all other FROG Pool Tender replacements as directed.

Replacing a FROG Pool Tender Mineral Chamber

Must be replaced every 6 months or after one pool season.



1. FROG Pool Tender Mineral Chamber®

frogproducts.com 800-222-0169

Serial No. _____ FOR POOLS UP TO 25,000 GALLONS

Product Description: The FROG Pool Tender Mineral Chamber is the heart of an advanced pool care system that destroys bacteria. The patented mineral formula in the FROG Pool Tender Mineral Chamber is a disinfectant that also neutralizes acids, which helps keep the pH in an acceptable range with less monitoring. The controlled release of minerals provides an optimum level of protection in your pool. The FROG Pool Tender System* reduces chlorine use up to 50%*. Simply use with at least 0.5 ppm of an EPA registered source

Check the top of the box and back label of product to make sure you have the correct FROG Pool Tender Mineral Chamber to fit your FROG Pool Tender Cyclor.

IMPORTANT: The FROG Pool Tender Mineral Chamber must be replaced every 6 months or after one pool season, whichever is shorter.

2.



IMPORTANT: Remove and read the information card.


Please note: Complete instructions for inserting a FROG Pool Tender Mineral Chamber, FROG Pool Tender Algaecide and FROG Pool Tender Chlorine Chamber are included inside the FROG Pool Tender Mineral Chamber.



DANGER

- Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.

3.



Turn off pump and turn control dial to Setting 0. This reduces the flow of water into the unit when the cap is open.

4.




Open FROG Pool Tender Cyclor cap.

5.

Remove the FROG Pool Tender Chlorine Chamber and if not empty, set to the side or store for winter. Then remove the FROG Pool Tender Mineral Chamber and discard if it has been used for one pool season or 6 months, whichever is shorter.

6.

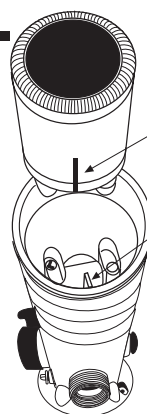

Slot in FROG Pool Tender Mineral Chamber

Fin inside FROG Pool Tender Cyclor

Find slot on side of FROG Pool Tender Mineral Chamber and line up with fin inside the FROG Pool Tender Cyclor. Lower FROG Pool Tender Mineral Chamber into FROG Pool Tender Cyclor until secure.

Replace the FROG Pool Tender Chlorine Chamber inside the FROG Pool Tender Mineral Chamber to continue operating system. (See directions on page 17.)

7.



Mark your calendar ahead for the six month replacement of the FROG Pool Tender Mineral Chamber. **Once wetted, the time-released mineral coating of this product is effective up to 6 consecutive months or one pool season, whichever is shorter. After that time you will hear the spent media inside, however, it is no longer effective and must be replaced.**

Use FROG Pool Tender Algaecide for an Algae-Protection Guarantee

NOTE: If using directly after a shock treatment, test the water first to ensure the pH is in the proper range of 7.2-7.8 and the chlorine level is no more than 4.0 ppm. Avoid using other chemicals until this product has been circulated (filtered) for at least 24 hours.

If you are not using FROG Pool Tender Algaecide, refer to page 17 for Using the FROG Pool Tender Chlorine Chamber. See FROG Pool Tender Algaecide product labeling for complete directions for use (EPA Reg. No. 53735-9).

For a preventive dose add:

- One FROG Pool Tender Algaecide for pools up to 15,000 gallons.
- Two FROG Pool Tender Algaecide for pools between 15,000 and 30,000 gallons.



DANGER

Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.

Important: If storing FROG Pool Tender Algaecide prior to use, always keep in a cool, dry place away from children and pets.

1.



Remove cap from FROG Pool Tender Algaecide without removing seal.

Turn off pump. Turn control dial to 0. Open Cyclor cap. Stand back to let any chlorine fumes dissipate.

2.



Insert upside down into the open center of the FROG Pool Tender Mineral Chamber pushing down firmly on FROG Pool Tender Algaecide bottle allowing key in FROG Pool Tender Cyclor to puncture seal.



Looking down at top of bottle


seal

3.




Replace cap by hand only.
DO NOT OVER TIGHTEN.

4.




Turn control dial to Setting 10.

5.



Turn pump on for 90 minutes allowing FROG Pool Tender Algaecide to circulate through pool.

6.



To remove expended FROG Pool Tender Algaecide bottle, turn pump off and turn dial to Setting 0.

7.



Remove FROG Pool Tender Cyclor cap.

8.



Lift FROG Pool Tender Algaecide up and allow any water in the container to drain through the FROG Pool Tender Cyclor before discarding in trash or offering for recycling. Do not reuse or refill this container.

NOTE: If water shows more than a hint of blue inside FROG Pool Tender Cyclor, replace the FROG Pool Tender Cyclor cap, turn dial to Setting 10 and run the pump for one minute.

8a. If pool size requires additional FROG Pool Tender Algaecide, repeat steps 1-8.

8b. When water is clear in the FROG Pool Tender Cyclor, insert a FROG Pool Tender Chlorine Chamber according to the instructions on page 17.

Using the FROG Pool Tender Chlorine Chamber



FROG Pool Tender Chlorine Chamber is required to assure up to 50% reduction in chlorine use*. FROG Pool Tender Chlorine Chamber sold separately.
(EPA Reg. No. 53735-2)



DANGER

Never use fast dissolving chlorine tablets, liquid bleach, or calcium hypochlorite in the FROG Pool Tender Cyclor.



WARNING

Avoid sparks, smoking, or any open flame near FROG Pool Tender Cyclor or chemicals.

IMPORTANT: Read the label on the FROG Pool Tender Chlorine Chamber carefully before using.

1.



Turn pump off. Turn control dial to 0.


Remove cap from FROG Pool Tender Cyclor and stand back to let any chlorine fumes dissipate.

2.



Remove colored caps by grabbing on to the lip of one cap with a pliers and pulling up until cap releases. Repeat the process for the other cap.

3.



Invert FROG Pool Tender Chlorine Chamber and shake slightly until chlorine tablets fall into tower areas.

4.




Line up the small leg of the FROG Pool Tender Chlorine Chamber with the small opening in the FROG Pool Tender Mineral Chamber and the large leg with the large opening. Lower FROG Pool Tender Chlorine Chamber into FROG Pool Tender Mineral Chamber until secure.

FROG Pool Tender Mineral Chamber

Top View

FROG Pool Tender Chlorine Chamber



5.



Replace cap by hand only.
DO NOT OVER TIGHTEN.

6.



The chlorine pac container is made of HDPE plastic. Non-refillable container. Do not reuse or refill this container. Rinse thoroughly before discarding in trash or offering for recycling if available.


7.



Mark your calendar ahead for the approximate replacement times for the FROG Pool Tender Chlorine Chamber.


Winterizing

1.




Turn pump off and turn dial to Setting 0.

2.



Remove cap.

3.

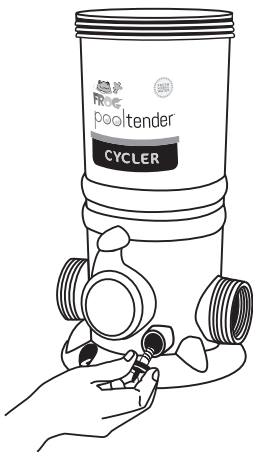

Unscrew knob from the front of FROG Pool Tender Cyclor. Allow all water to drain.

4.



If FROG Pool Tender Chlorine Chamber still contains chlorine, wrap in plastic bag and store in shed or cool, dry, well-ventilated location away from children, pets, cars, motorcycles or anything metal that can rust, pit, etc.

If empty, rinse and recycle.



WARNING


Avoid sparks, smoking, or any open flame near FROG Pool Tender Cyclor or chemicals.

5.



Remove the FROG Pool Tender Mineral Chamber and discard in trash. You will hear spent media inside, however, it is no longer effective.

6.




Replace the cap and knob loosely.

Troubleshooting

For more in-depth troubleshooting, go to frogproducts.com or call King Technology at 800-222-0169.

Problem	Remedy		
1. What do I do if the water looks cloudy?	<p>1. Make sure your filtration system is working properly (i.e. clean filter, skimmer and pump basket).</p> <p>2. Make sure circulation time is adequate – increase pump</p>	<p>time if not.</p> <p>3. Make sure the pool is properly balanced. (See page 11.)</p> <p>4. Shock the water to eliminate build up of any organic matter.</p>	<p>5. Make sure pool has a free chlorine reading of 0.5 to 1.0 ppm.</p> <p>6. Check with your dealer for more information.</p>
2. What do I do if the water turns color?	<p>1. Algae may be trying to form – shock the pool, increase circulation time if needed and clean the filter.</p>	<p>2. Metals in the fill water may have been oxidized. Have the pool tested. See pool dealer if a metal control product is required.</p>	<p>3. Check with your dealer for more information.</p>
3. What do I do if algae forms in or on my pool?	<p>1. Use FROG Pool Tender Algaecide or an effective algaecide per the directions on the bottle and brush the sides of the pool often.</p>	<p>2. Clean the filter and shock the pool with chlorine daily until water clarity returns.</p> <p>3. If you are in an area of the country that struggles with algae growth, see your dealer</p>	<p>regarding a 90-day Algae Protection Guarantee using FROG Pool Tender Algaecide.</p> <p>4. Check with your dealer for more information.</p>
4. What do I do if I am under chlorinating with the FROG Pool Tender Chlorine Chamber?	<p>1. If you are unable to maintain 0.5 to 1.0 ppm, first make sure there are chlorine tablets in the tower areas of the FROG Pool Tender Chlorine Chamber and it is installed properly. If a correction was made, test the water in 24 hours.</p> <p>2. If still low, turn the dial up one setting and test the water again in 24 hours. Continue raising the setting by one increment each day until the</p>	<p>proper reading is achieved.</p> <p>3. Shock the pool if the reading has been lower than 0.5 ppm for more than one day.</p> <p>4. Make sure pump run time is at least 6 hours on high speed (40 gpm or higher) or if not, bleed the air from the back knob each time cap is open.</p> <p>5. Contact your dealer to have your back pressure tested. If under 4 psi consider a smaller</p>	<p>eyeball fitting in the return jet.</p> <p>6. Check for a suction side leak by looking for air bubbles in your pump basket or at the return jet. Contact dealer for help in correcting this situation.</p> <p>7. Contact King Technology's Customer Service Department at 800-222-0169.</p>
5. What do I do if I am over chlorinating with the FROG Pool Tender Chlorine Chamber?	<p>1. If the chlorine reading is over 3.0 ppm, remove the FROG Pool Tender Chlorine Chamber from the FROG Pool Tender Mineral Chamber and test the water daily until the reading is down to 1.0 ppm.</p> <p>2. Reinsert the FROG Pool Tender Chlorine Chamber, lower the dial one setting and test the water again in 24 hours. If the reading has risen, lower the dial one setting again. Continue this</p>	<p>process until proper reading is achieved.</p> <p>3. If over-chlorinating at the lowest possible setting, consider decreasing the circulation time. Depending on your pump size, you may be circulating the water more than is necessary.</p> <p>4. Contact your dealer to have your back pressure tested. If over 8 psi consider a larger eyeball fitting in the return jet.</p>	<p>5. Check to see if the pressure relief valve is loose or missing and replace. It is a clear plastic piece approximately 1" long installed inside near the base. If loose or missing, it can provide another avenue for water to reach the chlorine.</p> <p>6. Contact King Technology's Customer Service Department at 800-222-0169.</p>

Parts List

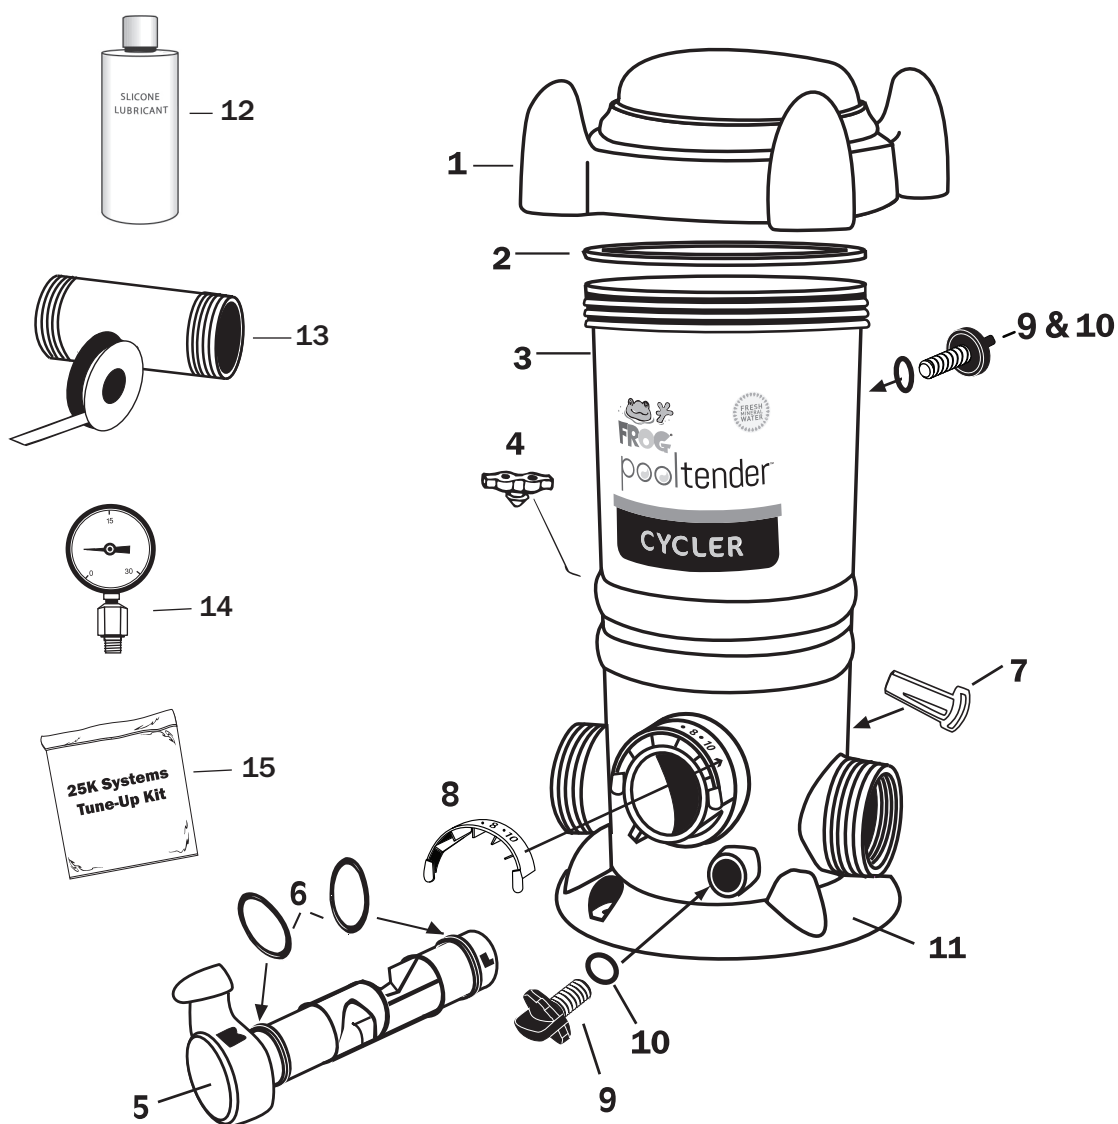

Included with FROG Pool Tender Cyclor

REF. #	DESCRIPTION	QTY. INCLUDED
1 & 2	Cap w/O-Ring	1
3	Body	1
4	Pressure Relief Valve	1
5, 6, 7, 8	Control Dial with O-Rings, Locking Pin and Number Plate	1
9 & 10	Knob with O-Ring	2
11	Mounting Base	1
12	Silicone Lubricant	1
13	Nipple Kit	1


Replacement parts for FROG Pool Tender Cyclor

REF. #	PART NO.	DESCRIPTION
1 & 2	01-22-1423	Cap w/O-Ring
2	01-22-1922	Cap O-Ring
4	01-22-9485	Pressure Relief Valve
5, 6, 7, 8	01-22-1453	Control Dial with O-Rings
6	01-22-1456	Control Dial O-Ring Set
9 & 10	01-22-9631	Knob with O-Ring
11	01-22-1482	Mounting Base
12	01-22-9972	Silicone Lubricant 3/4 oz.
13	01-22-1711	Nipple Kit
14	01-22-4000	Pressure Gauge
15	01-22-1470	25k Tune-Up Kit

FROG Pool Tender Cycler Maintenance

Replacing the Control Dial O-Rings

1.



Center of locking pin

In the back of the FROG Pool Tender Cycler, depress center of locking pin with a finger and pull pin out of dial.

2.



Turn control dial back and forth as you pull it out of the housing.

3.



Replace both O-rings. Apply silicone lubricant that came with your FROG Pool Tender Cycler on O-rings.



SILICONE LUBRICANT

Part No. 01-22-9972

4.



Carefully insert control dial back into housing.

5.




Replace locking pin by pushing it through the slots on the dial until it locks into place.


continued... FROG Pool Tender Cyclor Maintenance

Replacing the Cap O-Ring


1. Remove old O-ring.

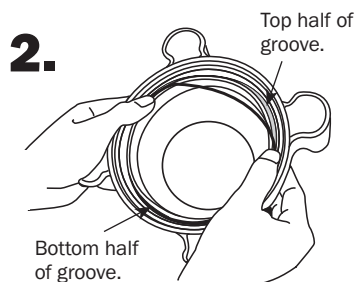

Place new O-ring in bottom half of groove.



Place your thumbs on each side of the cap over the O-ring in the groove.

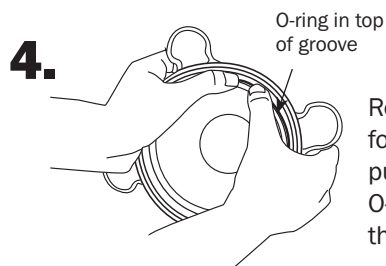

Roll your thumbs back and forth over the O-ring while pushing upward until the O-ring falls into the top of the groove.



Part No. 01-22-9972


Lubricate O-ring every couple of months with silicone lubricant that came with your FROG Pool Tender Cyclor.

DO NOT USE petroleum based lubricants.


Replacing Knobs

To replace, simply unscrew old knob and replace with the new one.

- 1.

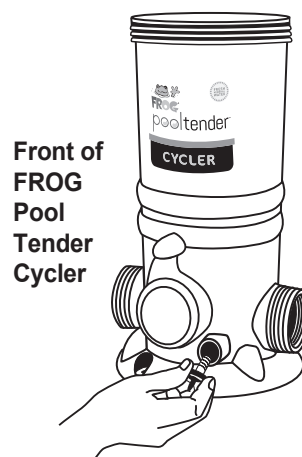

- 2.

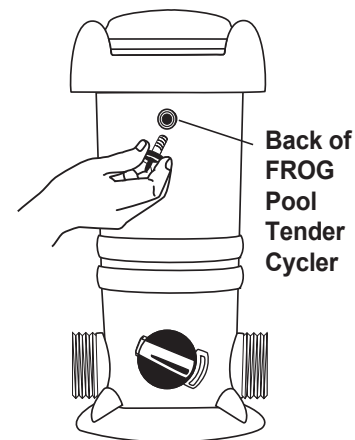

For limited warranty terms and to register your product,
see frogproducts.com/reg or call 1-800-222-0169.

Failure to register your product does not diminish
your warranty rights.

Made in U.S.A.
Patents: kingtechnology.com/IP

MANUFACTURED FOR



6000 CLEARWATER DR | MINNETONKA, MINNESOTA 55343
800-222-0169 | frogproducts.com

20-48-0100
1023R4